

KIKS 2012 Team Description

Kenji Inukai, Yasuyuki Iwauchi, Shoma Mizutani,
Takaya Asakura, Ryu Goto, Masato Watanabe and Toko Sugiura

Toyota National College of Technology,
Department of Electrical and Electronic engineering,
2-1 Eisei-cho, Toyota Aichi, 471-8525, Japan

sugi@toyota-ct.ac.jp

URL: <http://www.ee.toyota-ct.ac.jp/~masa/2012/kiks2.htm>

Abstract. This paper is used to qualify as participation to the RoboCup 2012 small-size league (SSL) about team “KIKS”. Our robots and systems are designed under the RoboCup 2012 rules in order to participate in the RoboCup competition. The major improvements in this year are the enhancement of the performance and robustness of wheels, dribbling device and electrical circuit. The overviews of them are described.

Keywords: RoboCup, small-size league, engineering education, global vision

1. Introduction

Main purpose of our participation to the RoboCup world competition is confirmation and evaluation of the results of the PBL (Project Based Learning) experiments. The creative minds of students are educated using the robot contest held in our department every year. In the RoboCup world competition, our team has continuously participated since 2004. We came in the top 4 in Singapore and Istanbul. Since we are aiming for the higher position in this year, further improvements has been done.

Robot's performance was improved by replacing to brushless DC (BLDC) motor at last year. But, we found the durability problems related to wheels through the competition. The dribble device was also in poor condition. So, we redesigned whole mechanical parts, and especially tried to replace the parts of wheel and dribbling device.

The main topics of developed system in 2012 are following terms,

- Improvement of the wheels
- Improvement of the dribbling device
- Improvement of the circuit for BLDC motors and high voltage charger

2. Hardware of the robot

The basic configuration of a 2012 model is common with the 2011 version. We made the omnidirectional wheels ourselves. We also use the brushless motors (maxon EC45 flat) for the driving motor, as in many teams. For the dribbling device, we also use the brushless motor (maxon EC-max22). Each robot has three solenoids. One is for straight kick and the other two are for chip kick. The robot is able to shoot the ball at a speed of 10[m/s], however, it is down to 8[m/s] to keep to the regulations. The height of the robot is 148[mm] and diameter is 178[mm].

Table1. Specification of the 2012 version

	2012 version
Weight	2.3kg
Main material	Aluminum alloy
Driving motor	maxon EC45flat (30Watt)
Gear ratio	3.6 : 1
Wheel diameter	56mm
Number of solenoids	Straight kick: 1 Chip kick: 2
Straight kick power	Ball speed of 8[m/s]
Chip kick power	3.0m away from robot


2.1 Robustness improvement of the wheel

In RoboCup2011, many problems were occurred by hard collision in play. Especially, the wheels were badly damaged to the flange of the bearing. Figure 1 shows the bearing used in the wheel. Fig.1 (a) shows the normal one and (b) shows the broken one. More than 20 bearings were damaged in the game. This fact may be caused a serious problem in rule of 2012. Because the direct free-kick will award to opposite team, in case the parts of our robots fall on the field and it results in a disadvantage of opposite team. Anyway, we need to solve quickly this problem.



Fig.1 Bearings used in wheel of 2011 version, (a) normal and (b) broken

Fig.2 (a) shows the 2011 version and (b) shows the 2012 version after improvement. In 2011 version, the external thrusting forces give the damage to flange of the bearing. Therefore, in 2012 version, we replace the bearing with the larger bearing with no flange to counter the influence of external forces. Incidentally, the cost was also decreased. Now we're examining the many facets for the robustness of this new wheel. A part of experimental results is shown in Table 2. An aluminum solid of 2.4kg is fallen down perpendicularly from the position of 50cm height to the center of the side-face in wheel. We verified the practical effectiveness by evaluation of repeat count until crash. As a result, it seems fairly good performance.

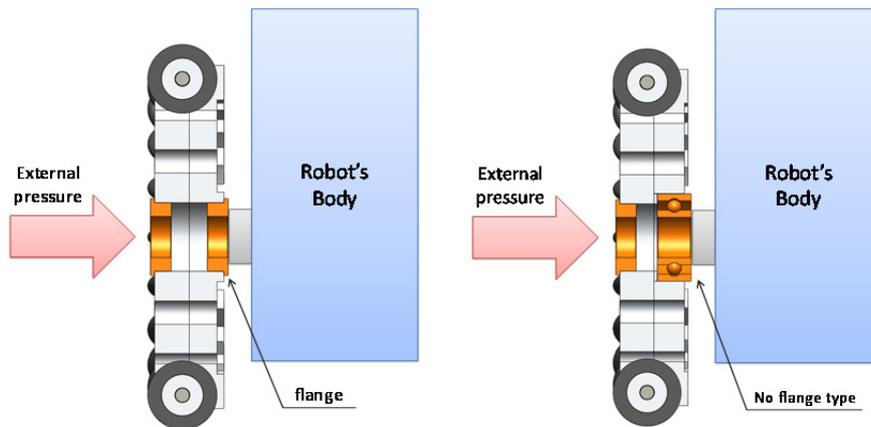

(a) 2011 version

(b) 2012 version

Fig.2 Structure of the wheel (Cross-sectional view of 3D CAD)

Table2. Confirmation of the durability of new wheel

	Repeat count until crash
2011 version	4
2012 version	over 10

2.2 Optimization of dribbling device

In 2011, we changed the dribbling brush motor into brushless one (maxon EC-max22) to give the powerful backspin to the ball. But, in current mechanism of dribbling device, it is occurred the vibrational oscillation from time to time when the ball is rotated at high speed. The failure that was not able to hold a ball resulted from the vibration. It means that it is not necessary with high speed of dribbling device. So, we tried to optimize the parameters for the dribbling device by using the Solid Works Motion as an aid to the analysis. We investigated about the suction force of the dribbling device. It is evaluated by the height of the roller and its diameter as the parameter. When the vibration is occurred, there is also vibrational oscillation in electrical current of circuit. So, we fabricated the experimental device to find the optimum value mentioned above. Experimental device to obtain electrical current and suction force is shown in Fig. 3.



Fig.3 Experimental mechanism for dribbling device

Figure 4 shows the relationship between suction force to the ball and the roller's height in dribbling device. In Fig.4 the suction force to the ball is increasing as increase of roller's height. On the other hand, the suction force is not changed much under the condition that the diameter of the roller increases doubly, as shown in Fig.5. Summarizing the experimental results in limited condition, the diameter of the roller does not significantly affect to the suction force, and it is found that the roller's height from ground is more important factor.

Figure 6 shows the relationship between the variance of the electrical current and the roller height. From Fig.6, it is predicted that the variance of electrical current will be getting worse if the diameter of the roller is over 18mm long. Therefore, we define the roller's diameter and height from ground on the basis of these results.

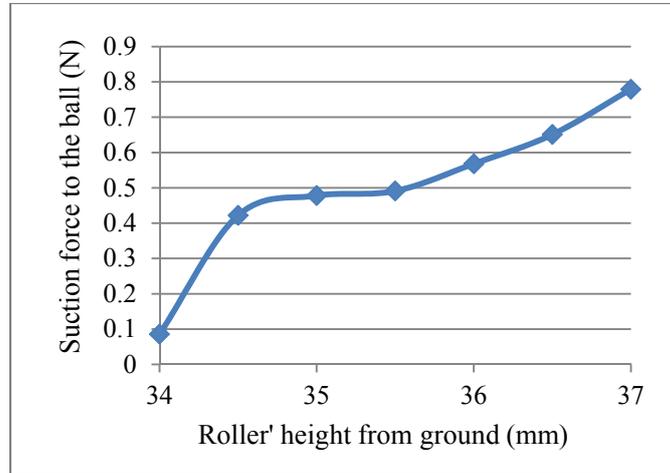


Fig.4 Dependence of suction force to the ball with the roller's height (the diameter of roller is fixed with 15mm)

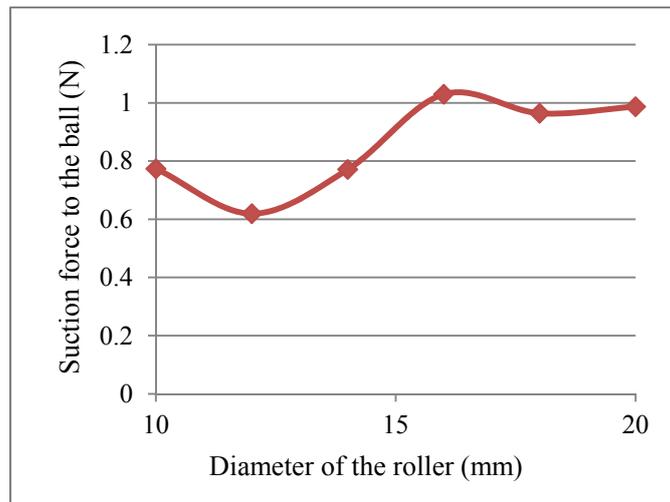


Fig.5 Dependence of suction force to the ball with the roller's diameter (the roller's height is fixed with 35mm from ground)

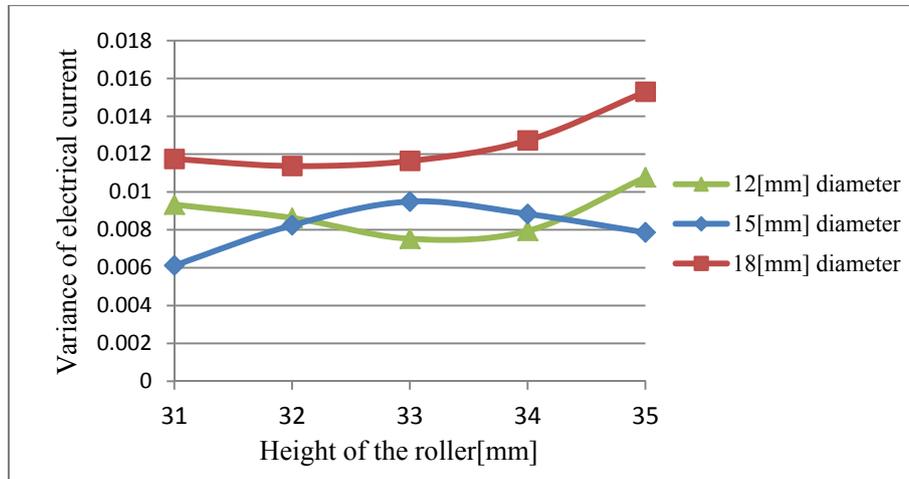


Fig.6 Relationship between the variance of electrical current vs. roller's height from ground as the parameters of roller's diameter

3. Electrical design

The electronic circuit of KIKS is mostly same as last year. The new electronic circuits consist of two main boards shown in Fig.7. They are main control unit and peripheral control unit. The main control unit includes the main CPU, power supply circuit, wireless communication module, ball detecting circuit and dribbling motor controller. The peripheral control unit includes motor driver and voltage booster. The major changes are motor driver and voltage booster circuit.

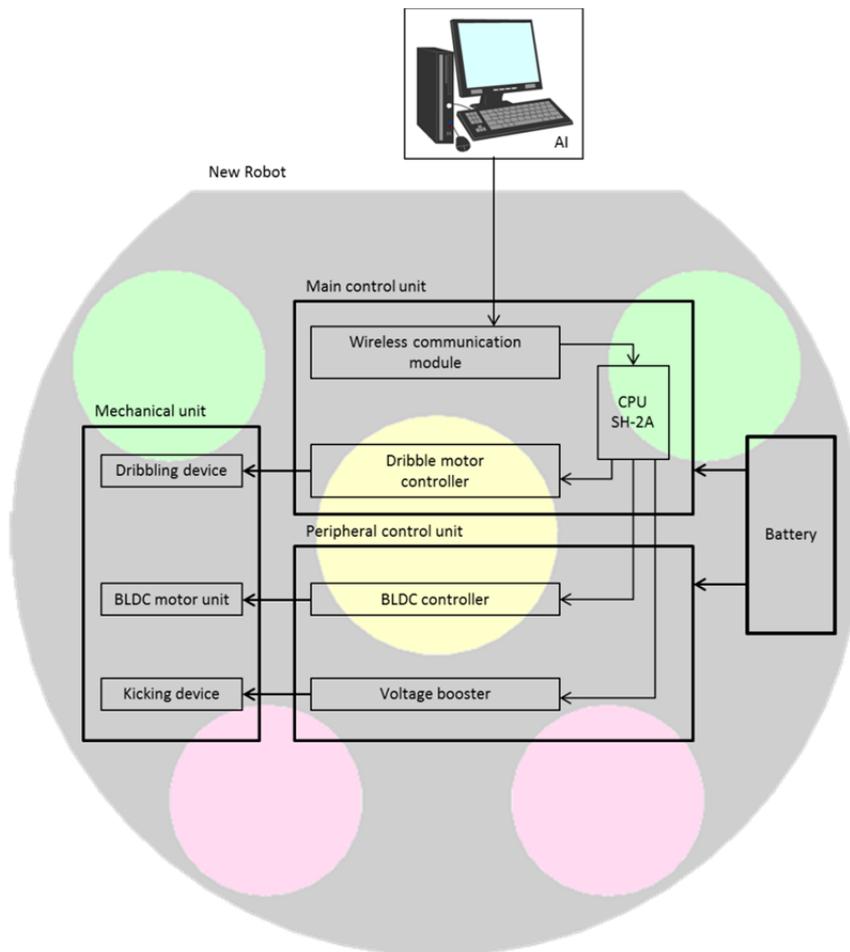


Fig.7 Construction of electrical circuit in the robot

3.1 Main Control unit

This unit includes the circuit for detecting a ball, power supply circuit and wireless communication module. The SH7262 (SH-2A series of Renesas) is used for a main CPU that communicate each PIC for the peripheral controllers, such as BLDC controller, voltage booster circuit etc. The CPU runs 144MHz (345MIPS) and has 1MB RAM. Its performance is enough to achieve the precise control of the robot.

3.2 Wireless communication system

We have used the Digi's XBee module for communication system between host PC and each robot. The wireless communication's frequency is 2.4GHz band. The XBee module is able to communicate faster than conventional wireless module. It is possible to communicate up to 115200bps.

3.3 BLDC motor driver

An each robot has four BLDC motor driver circuits for omnidirectional moving. The MCU of motor driver is dsPIC30F4011. This circuit is added electrical current sensing system. So, it is possible to control torque of each motor. The motor speed of the robot is controlled by PI speed control in MCU. This circuit is also used for dribbling motor controller.

3.4 Voltage booster circuit

The DC-DC converter to boost up the voltage used for the solenoid is changed from last year. To shorten the charging time, we optimize the inductance and switching frequency. In last year the time to charge up to 200V from 16V is five seconds, but that time of this year is shortened 2.7 seconds.

The input voltage of 16V is converted to 200V output. This chopper circuit is controlled by PIC in each robot. In the kicking device, the output voltage of 200V is charged in 4100 μ F capacitor.

4. Software design

Software design is mostly same with last year. The overall software architecture is shown in Fig 8. The software consists of three threads, i.e., the Game Thread, the SSL-Vision Receiver Thread and the Referee Box Receiver Thread. Moreover, the Game Thread includes some modules. They are described below.

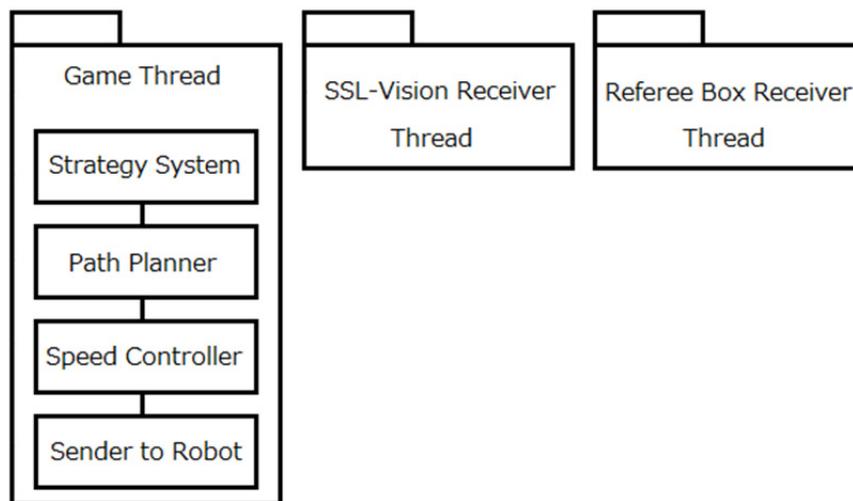


Fig.8 Software architecture

4.1 Strategy system

Strategy system is improved from last year. The architecture of new strategy system is illustrated in Fig. 9. The strategy system consists of four modules called "Situation Analysis", "Strategy", "Formation" and "Action". They are defined as following.

4.1.1 Situation Analysis module

This module is located at top level in strategy system. This module plays the role of analysis about the game situation from both position of the ball and robots on the field and generation of the trial instruction command.

4.1.2 Strategy module

This module is located at below level of Situation Analysis module. The role of this module is to select the optimal next Formation module from result of analyzing. For example, when the result of analysis is "Indirect Free Kick of Own team", the Strategy module will select the "Indirect Kick Formation module". On the other hand,

when the result of analysis is “Need to Defense”, the Strategy module will select the "Defense Formation module". Since the Strategy module has many strategy patterns, it will be able to select the optimal Strategy module corresponding to the game situation.

4.1.3 Formation module

This module is located at below level of Strategy module. This module plays the role to decide Action module which should be performed by each robot in next.

4.1.4 Action module

This module is located at the bottom level in strategy system. The role of this module is to command the specific operations to each robot. The "Direct Shoot Action" for instance, is command to kick a ball for the robot. Alternatively, the "Wall Defense Action" means the robots move to the position defending the goal.

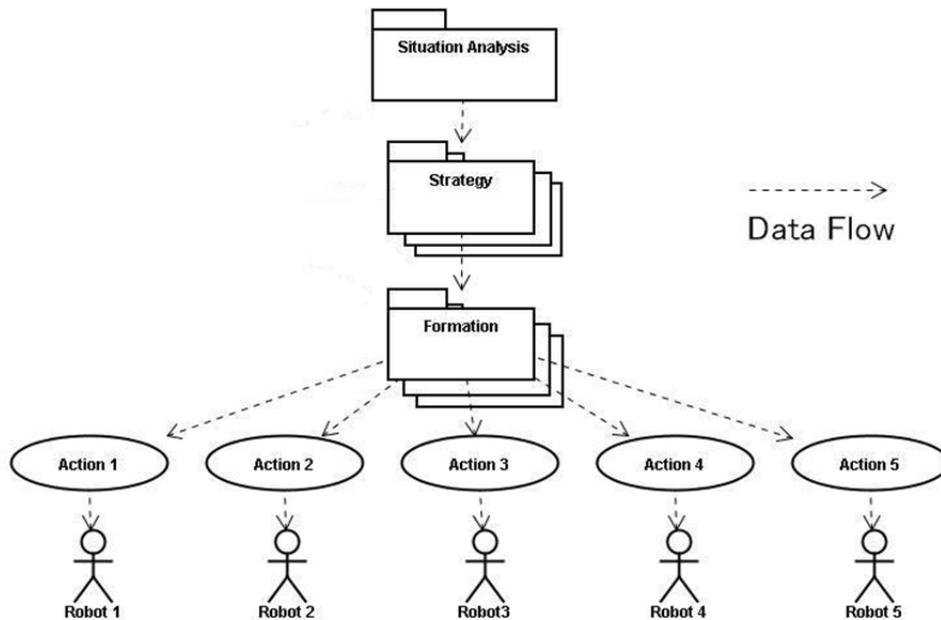


Fig.9 Construction of strategy system

4.2 Path Planning

Destination of each robot is determined by the Strategy system. Path Planning generates a route that avoids defense area and the other robots. The method of generating route is followings. First, it generates the linear route that connects the current position and destination. Next, it checks all of obstacle position. If there is obstacle on the route already generated, it is changed the route using an arc formed with constant

radius at around the obstacle. Then, if there is still other obstacle on the route, the radius is increased until that can be avoiding obstacle.

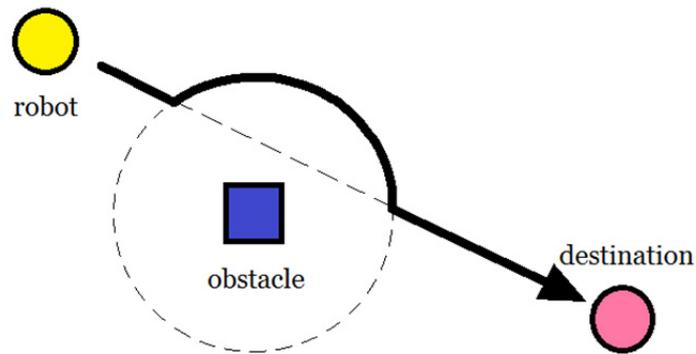


Fig.9 Route generation to avoid obstacle

4.3 Speed Controller

Speed Controller calculates the data related velocity to send the robot based on the generated route. Speed Controller has several types. Optimal type of the controller is selected corresponding to the role of robot.

5. Conclusions

Our robots have been continuously improving in every year. As the results, the durability and the performance of robots are getting better than previous year. Especially, the improvements of dribbling device are effective for construction of numerous strategies and pass plays.

We hope that our robots will perform better in this coming competition.